




Three Phase Hybrid Inverter

SUN- 6 / 8 / 10 / 12 / 15 / 20 K-SG01HP3-EU-AM2

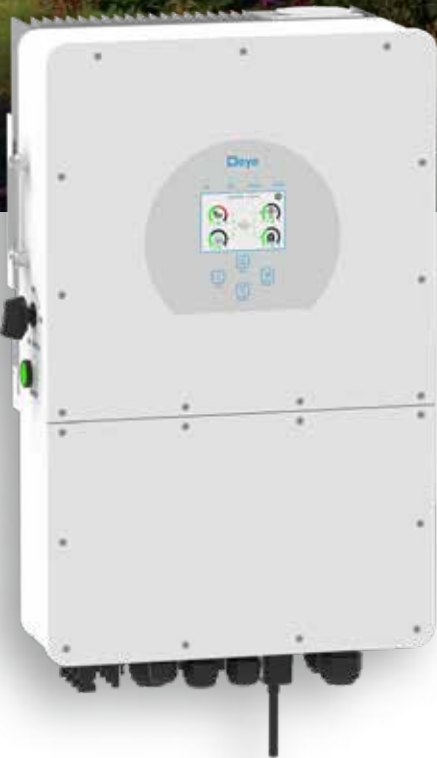

- 100** 100% unbalanced output, each phase; Max. output up to **50%** rated power
-  DC couple and AC couple to retrofit existing solar system
- 10** Max. 10pcs parallel for on-grid and off-grid operation; Support multiple batteries parallel
- 37** Max. charging/discharging current of 37A
- H** High voltage battery, higher efficiency
- 6** 6 time periods for battery charging/discharging
-  Support storing energy from diesel generator

Deye

Stock Code: 605117.SH

Model	SUN-6K-SG01HP3 -EU-AM2	SUN-8K-SG01HP3- EU-AM2	SUN-10K-SG01HP3 -EU-AM2	SUN-12K-SG01HP3 -EU-AM2	SUN-15K-SG01HP3 -EU-AM2	SUN-20K-SG01HP3 -EU-AM2
Battery Input Data						
Battery Type	Li-Ion					
Battery Voltage Range (V)	160~700					
Max. Charging Current (A)	37					
Max. Discharging Current (A)	37					
Number of battery input	1					
Charging Strategy for Li-Ion Battery	Self-adaption to BMS					
PV String Input Data						
Max. DC Input Power (W)	7800	10400	13000	15600	19500	26000
Max. DC Input Voltage (V)	1000					
Start-up Voltage (V)	180					
MPPT Range (V)	150-850					
Full Load DC Voltage Range (V)	195-850	260-850	325-850	340-850	423-850	500-850
Rated DC Input Voltage (V)	600					
PV Input Current (A)	20+20		26+20		26+26	
Max. PV I _{sc} (A)	23+23		32+23		32+32	
No.of MPP Trackers	2					
No.of Strings per MPP Tracker	1		2+1		2	
AC Output Data						
Rated AC Output and UPS Power (W)	6000	8000	10000	12000	15000	20000
Max. AC Output Power (W)	6600	8800	11000	13200	16500	22000
AC Output Rated Current (A)	9.1/8.1	12.2/11.6	15.2/14.5	18.2/17.4	22.8/21.8	30.4/29
Max. AC Current (A)	13	18	22	25	30	35
Max. Continuous AC Passthrough (A)	80					
Peak Power (off grid)	1.5 time of rated power, 10 S					
Generator input/Smart load /AC couple current (A)	9.1 / 80 / 9.1	12.2 / 80 / 12.2	15.2 / 80 / 15.2	18.2 / 80 / 18.2	22.8 / 80 / 22.8	30.4 / 80 / 30.4
Power Factor	0.8 leading to 0.8 lagging					
Output Frequency and Voltage	50/60Hz; 3L/N/PE 220/380, 230/400Vac					
Grid Type	Three Phase					
DC injection current (mA)	<0.5%1n					
Efficiency						
Max. Efficiency	97.60%					
Euro Efficiency	97.00%					
MPPT Efficiency	99.90%					
Protection						
Integrated	PV Input Lightning Protection, Anti-islanding Protection, PV String Input Reverse Polarity Protection, Insulation Resistor Detection, Residual Current Monitoring Unit, Output Over Current Protection, Output Shorted Protection, Surge protection					
Output Over Voltage Protection	DC Type II/AC Type III					
Certifications and Standards						
Grid Regulation	VDE4105 IEC61727/62116 VDE0126 AS4777.2 CEI 0 21 EN50549-1 G98 G99 C10-11 UNE217002 NBR16149/NBR16150					
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2					
General Data						
Operating Temperature Range (°C)	-40~60°C, >45°C derating					
Cooling	Smart cooling					
Noise (dB)	<45 dB					
Communication with BMS	RS485; CAN					
Weight (kg)	30.5					
Size (mm)	408W×638H×237D					
Protection Degree	IP65					
Installation Style	Wall-mounted					
Warranty	5 years					